


AC Current Probes

P6021 • P6022 Data Sheet

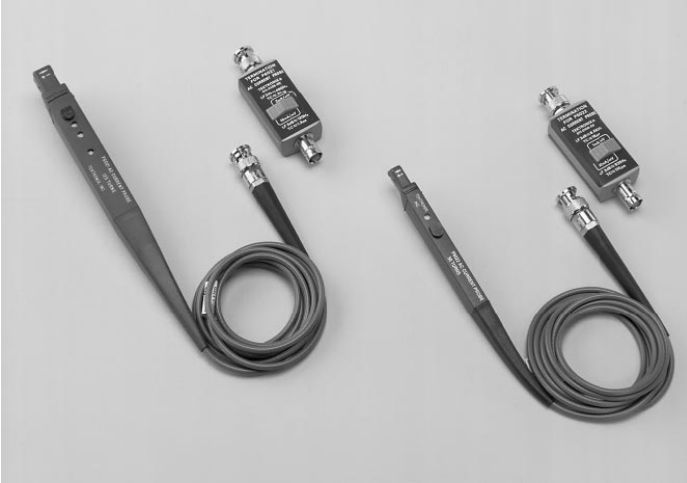

P6021 and P6022 AC Current Probes.

Features & Benefits

P6021

- 120 Hz to 60 MHz
- 15 A Peak
- For 1 M Ω Inputs
- Shielded Probe Heads
- AC Only
- Split Core

P6022

- 935 Hz to 120 MHz
- 6 A Peak
- For 1 M Ω Inputs
- Shielded Probe Heads
- AC Only
- Split Core

Applications

- Motor Drives
- Inverters
- Power Supply
- Avionics

P6021 and P6022 Current Probes

The P6021 and P6022 Current Probes provide versatile AC current measurements. Both probes provide accurate current measurements over a wide range of frequencies. The P6021 and P6022 allow current measurements without breaking the circuit by clipping onto the current carrying conductor. Shielded probe heads are not grounded when the slides are in their open positions, eliminating accidental grounding of the circuit under test.

P6021 Current Probe

For general purpose applications, the P6021 provides wide-band performance with excellent low-frequency characteristics. Bandwidth is 120 Hz to 60 MHz. The passive termination is switchable from 2 mA/mV to 10 mA/mV.

P6022 Current Probe

With a head size of 0.47 in. x 0.25 in. (10 mm x 6 mm, about half the size of the P6021) and a bandwidth of 935 Hz to 120 MHz, the P6022 is ideal for measuring currents in compact, high-performance circuits. Passive termination output is switchable between 1 mA/mV or 10 mA/mV.

ASEAN / Australasia (65) 6356 3900

Austria 00800 2255 4835*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777

Belgium 00800 2255 4835*

Brazil +55 (11) 3759 7627

Canada 1 800 833 9200

Central East Europe and the Baltics +41 52 675 3777

Central Europe & Greece +41 52 675 3777

Denmark +45 80 88 1401

Finland +41 52 675 3777

France 00800 2255 4835*

Germany 00800 2255 4835*

Hong Kong 400 820 5835

India 000 800 650 1835

Italy 00800 2255 4835*

Japan 81 (3) 6714 3010

Luxembourg +41 52 675 3777

Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90

Middle East, Asia, and North Africa +41 52 675 3777

The Netherlands 00800 2255 4835*

Norway 800 16098

People's Republic of China 400 820 5835

Poland +41 52 675 3777

Portugal 80 08 12370

Republic of Korea 001 800 8255 2835

Russia & CIS +7 (495) 7484900

South Africa +41 52 675 3777

Spain 00800 2255 4835*

Sweden 00800 2255 4835*

Switzerland 00800 2255 4835*

Taiwan 886 (2) 2722 9622

United Kingdom & Ireland 00800 2255 4835*

USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

Characteristics

Safety

UL3111-2-032, CSA1010.2.032, EN61010-2-032, IEC61010-2-032.

Ordering Information

P6021

5 ft. Current Probe with Termination.

Includes: 6 in. ground lead (196-3120-01); instruction manual (070-0947-045).

P6022

5 ft. Current Probe with Termination.

Includes: Same as the P6021; instruction manual (070-0948-03).

Passive Termination Only –

(P6021) - Order 011-0105-00.

(P6022) - Order 011-0106-00.

Service

Opt. C3 – Calibration Service 3 Years

Opt. C5 – Calibration Service 5 Years

Opt. D3 – Calibration Data Report 3 Years (with Option C3)

Opt. D5 – Calibration Data Report 5 Years (with Option C5)

Opt. R3 – Repair Service 3 Years

Opt. R5 – Repair Service 5 Years (P6021 only)



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

02 Oct 2011

60W-06647-2

